

# RAMFLEX THICKNESS: 6MM

Ramflex is a double-layered vulcanized rubber flooring with a hammered surface finish. The combination of two layers with different densities enables Ramflex to resist the wear and the weight of sports equipment while providing optimal comfort and energy return.




## CERTIFICATIONS

- Low VOC (Volatile Organic Compounds) emission
- GREENGUARD & GREENGUARD Gold (UL)
- Class A+ (French scope 2011-321)
- REACH compliant
- UNI EN ISO 9001
- CE marked product ( EN 14041 incl DoP)
- Fire EUROCLASS Cfl-S2 (EN 13501)

# RAMFLEX THICKNESS: 6MM



986

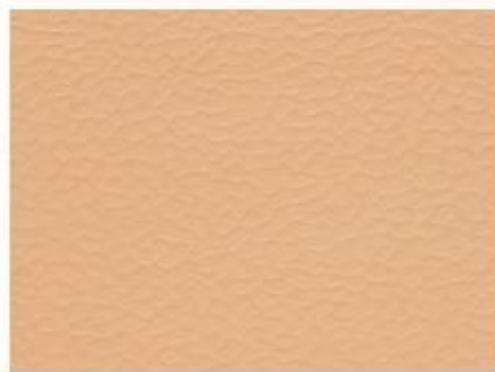

920



712




710



741



715

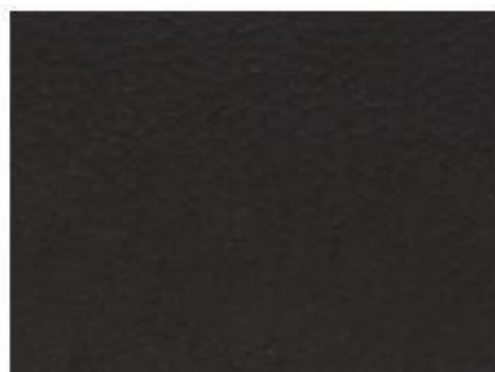

790



707

Thickness: 6 mm  
Roll Length: 13 m | Roll Height: 186 cm  
Weight: 8.00 kg/m<sup>2</sup>  
Tiles Dimension: 91,35 cm x 91,35 cm

# RAMFLEX THICKNESS: 6MM

Auburn University Recreation and Wellness Center, USA



Ramflex 6 MM perfect for:

- Holistic Fitness Classes
- Yoga
- Pilates
- Training
- Mobility and Stability work-outs
- Cardio Equipment Areas
- Soft Weights

Ramflex 10 MM also suitable for:

- Suspension training
- Functional Frames
- Weight Rooms
- Crossfit®

## PERFORMANCE & SAFETY

- Optimal combination of resistance and comfort thanks to its double-layered construction
- The product withstands wear from weights and light abrasions thanks to its 2 millimeter-thick rubber surface
- Perfect dimensional stability thanks to the combination of the surface layer and load bearing, flexible underlayer
- Easy maintenance - non-porous
- Anti-slip: grants the perfect grip for every workout (even barefoot)

WE INNOVATE.YOU WIN

 **MONDO**