


RAMFLEX THICKNESS: 10MM

Ramflex is a double-layered vulcanized rubber flooring with a hammered surface finish. The combination of two layers with different densities enables Ramflex to resist the wear and the weight of sports equipment while providing optimal shock absorption and energy return.

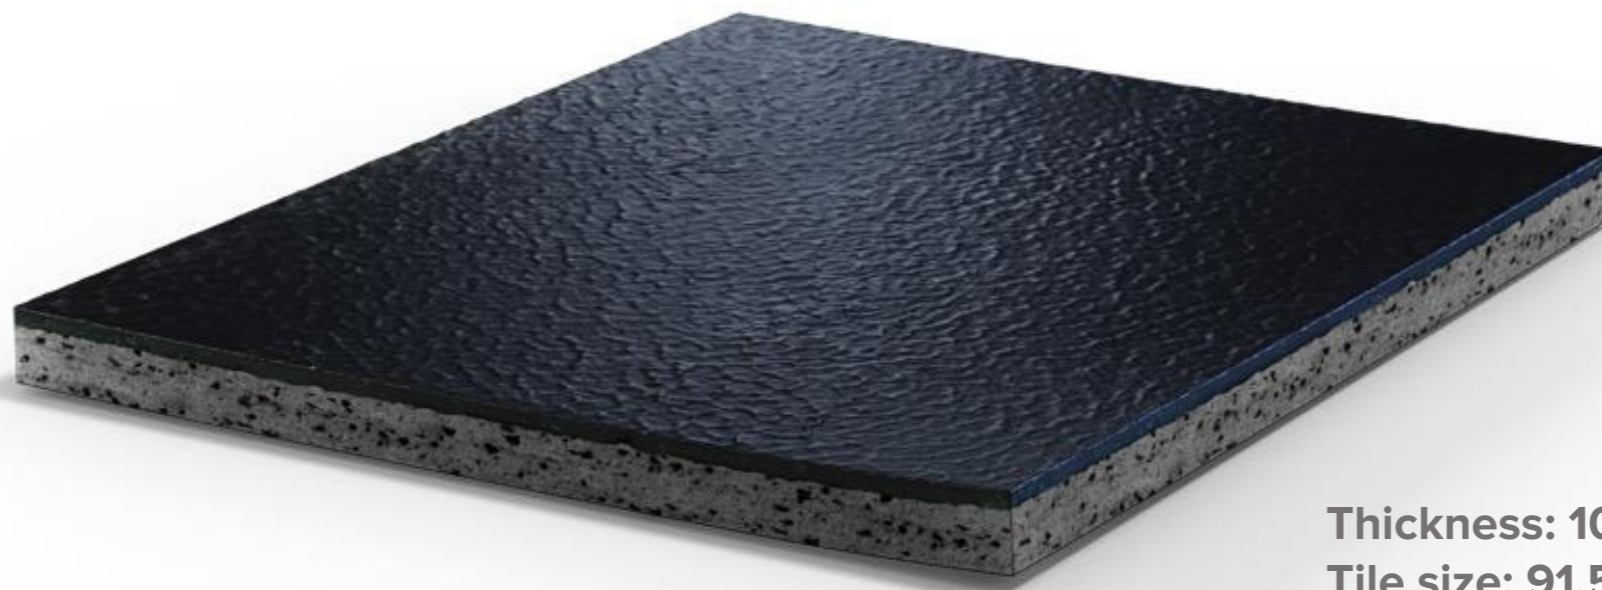

Thickness: 10mm
Tile size: 91.5 x 91.5 cm
Roll Height 186 cm | Roll Length 9m
Weight: 13.5 kg/m²


CERTIFICATIONS

- Low VOC (Volatile Organic Compounds) emission
- GREENGUARD & GREENGUARD Gold (UL)
- Class A+ (French scope 2011-321)
- REACH compliant
- UNI EN ISO 9001
- CE marked product (EN 14041 incl DoP)
- Fire EUROCLASS Cfl-S2 (EN 13501)

RAMFLEX THICKNESS: 10MM



986

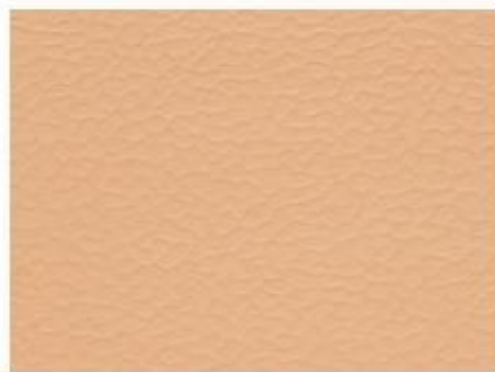

920



712




710



741



715

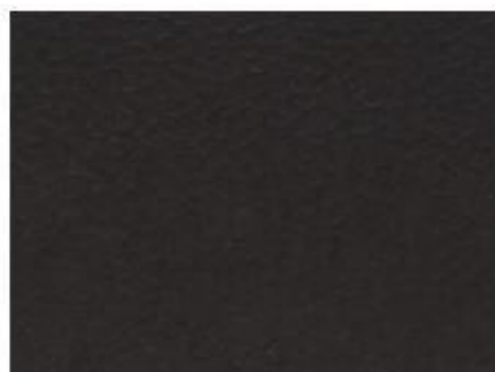

790



707

Thickness: 10 mm
Roll Length: 9 m | Roll Height: 186 cm
Weight: 13,5 kg/m²
Tiles Dimension: 91,35 cm x 91,35 cm

RAMFLEX THICKNESS: 10MM



Palestre Torino, Italy

Ramflex 10 MM perfect for:

- Suspension training
- Functional Frames
- Weight Rooms
- Crossfit®

Ramflex 6 MM suitable for

- Holistic Fitness Classes
- Yoga
- Pilates
- Training
- Mobility and Stability work-outs
- Cardio Equipment Areas
- Soft Weights

PERFORMANCE & SAFETY

- Optimal combination of resistance and shock absorption thanks to its double-layered construction
- The product withstands wear from weights and light abrasions thanks to its 2 millimeter-thick rubber surface
- Perfect dimensional stability thanks to the combination of the surface layer and shock-absorbing underlayer
- Easy maintenance - non-porous
- Anti-slip: grants the perfect grip for every workout (even barefoot)

WE INNOVATE.YOU WIN

 **MONDO**



Mondo Inlaid Platforms at work at the Wake Forest Training Center, USA
Click on the image to play the video