


## VINYLSPORT M5 COMBI

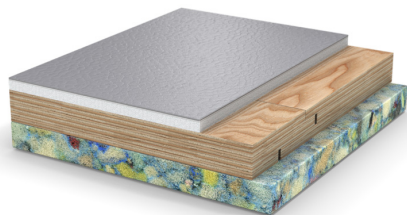

Combi-elastic indoor flooring system, with a VINYLSPORT finish on top, built on site with several different layers in a total thickness of 38 mm:

- A 500 gauge polyethylene sheet previously fitted on the floor, which prevents from high humidity rate coming from the subfloor by mean of creating a barrier of vapour.
- Expanded flexible polyurethane foam in sheets of 15 mm. thickness, providing excellent shock absorption. This underlayment provides excellent comfort and uniform shock absorption.
- Plywood panels for a total thickness of 18 mm, so to guarantee the best system

uniformity.

- PVC sports flooring for indoor use, supplied in rolls with a constant total thickness of 5,0 mm. The flooring is consisting of an embossed wear layer with protective treatment provided with solid color or wood effect, a high density fiberglass-reinforced layer and an expanded vinyl foam backing.

This product is ideal for a multisport indoor hall where different indoor sport competitions are held, such of basketball, handball, volleyball, badminton or futsal.

### STANDARDS

This product has been certified to be in compliance with with European Standard EN 14904 ("Surfaces for sports areas - Multi-sports floor systems for indoor use") including Declaration Of Performance (DoP, CE marking) and it is rated Euroclass Cfl-S1 in accordance with EN 13501.

This article is produced in compliance with the European Regulation REACH (Registration, Evaluation, Authorization and Restriction of Chemicals).

This product has been rated "Non Hazardous" by external laboratory in accordance with the European Waste Catalogue. This means that it does not present a subrisk to public health or cause adverse effects on the environment.

This product is designed and manufactured according to UNI EN ISO 9001 certification.

### CERTIFICATIONS

Available International Sport Federation certificates for this product:

**FIBA Certificate of Approval for Synthetic Flooring Category, Competition Level 2**


**BWF Synthetic Flooring Certificate**

**IHF Certificate of Approval for Synthetic Floorings**

## COLOR RANGE




VM82




VM11




VM10




VM18




VM21




VM90




VM70




VM41




VM23




VM81



VM30



VM66



VM67

## INSTALLATION AND MAINTENANCE

The product must be stored and installed in appropriate conditions, including suitable protected premises at guaranteed minimum and maximum temperatures and humidity, as fully described in MONDO's *Storage and Installation Instructions*. The product must be used and maintained following the premises described in MONDO's *Use and Maintenance Instructions*.

## DIMENSIONS

### Thickness

38 mm

### Weight

17,5 kg/m<sup>2</sup>