


## ZONE-IT MAGNETIC FLOORING SYSTEM 10 MM

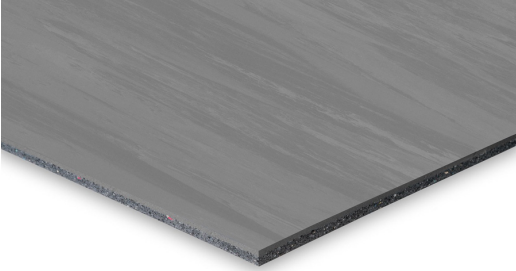

Prefabricated multipurpose sport flooring in tiles of 10 mm. Designed for interior applications, specifically engineered to be used with magnet PVC sheets-tiles (temporary installation). The upper layer has a composition with magnetic receptive properties thanks to the inclusion of a metal-like filler that makes it sensible to an external magnetic field (Magnet PVC tiles). Made of the highest quality natural and synthetic rubber, calendered and vulcanized together for durability and performance. Composed of two different layers with dual durometers. The top layer is non-porous and provides slip-resistance and strength. The bottom layer consists of a deformable construction that provides high cushioning for underfoot comfort, impact and noise absorption.

It has been specifically engineered to be used with the interchangeable PVC magnetic tiles (temporary installation), designed by MONDO.

Non porous rubber surface provides ease of maintenance and antibacterial protection against MRSA and odors. The use of rubber brings specific advantages in front of other materials, like no need of weld rods for installation and a superior protection against intensive use.

### STANDARDS COMPLIANCE

This product has been certified to be in compliance with European Standards EN 14041 including Declaration Of Performance (DoP, CE marking) and it is rated Euroclass Cfl-s2 in accordance with EN 13501.

This product has been certified in compliance with the following schemes and standards for Indoor Air Quality programs (VOC, Volatile Organic Compounds emissions):

- French scope (2011-321): Class A+.
- Environmental Product Declaration (EPD).

This product has been rated "Non Hazardous" by external laboratory in accordance with the European Waste Catalogue. This means that it does not present a subrisk to public health or cause adverse effects on the environment.

This article is produced in compliance with the European Regulation REACH (Registration, Evaluation, Authorization and Restriction of Chemicals).

This product is designed and manufactured according to UNI EN ISO 9001 certification.

Patent pending.

### MAINTENANCE AND INSTALLATION

The product must be stored and installed in appropriate conditions, including suitable protected premises at guaranteed minimum and maximum temperatures and humidity, as fully described in MONDO's *Storage and Installation Instructions*. The product must be used and maintained following the premises described in MONDO's *Use and Maintenance Instructions*.

## COLOR RANGE



Z02

## DIMENSIONS

Thickness	Weight	Tile Size
10 mm	13,9 kg/m <sup>2</sup>	91,35 x 91,35 cm

For additional product information, please refer to the Technical Data Sheet.