


VINYLSPORT PERFORMANCE 7 MM

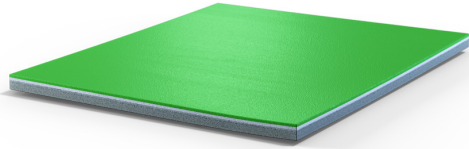

Prefabricated indoor sport flooring in PVC calendered rolls with a consistent thickness of 7 mm.

The product is comprised of two combined layers. The surface layer is embossed, with a matte, non-slip surface which is resistant to scratching due to the top covering in PU. The surface is coupled with an expanded PVC layer underneath, that is reinforced with fiberglass and slightly textured with small stems for enhanced stability.

This product is ideal for a multisport indoor hall where different indoor sport competitions are held, such of basketball, handball, volleyball, badminton or futsal.

STANDARDS COMPLIANCE

This product has been certified to be in compliance with European Standards EN 14904 ("Surfaces for sports areas - Multi-sports floor systems for indoor use", Shock absorption $\geq 25\%$, Class P1) including Declaration Of Performance (DoP, CE marking) and it is rated Euroclass Cfl-s1 in accordance with EN 13501.

This product has been rated "Non Hazardous" by external laboratory in accordance with the European Waste Catalogue. This means that it does not present a subrisk to public health or cause adverse effects on the environment.

This product has been certified in compliance with the following schemes and standards for Indoor Air Quality programs (VOC, Volatile Organic Compounds emissions):

- French scope (2011-321): Class A+.
- Italian regulation CAM (Minimum Environmental Criteria) following D.M. 11/01/2017.
- M1 - Emission Class for Building Material (RTS, Finland).

This article is produced in compliance with the European Regulation REACH (Registration, Evaluation, Authorization and Restriction of Chemicals).

This product is designed and manufactured according to UNI EN ISO 9001 certification.


CERTIFICATIONS

Available International Sport Federation certificates for this product:

BWF Synthetic Flooring Certificate

IHF Certificate of Approval for Synthetic Floorings

COLOR RANGE

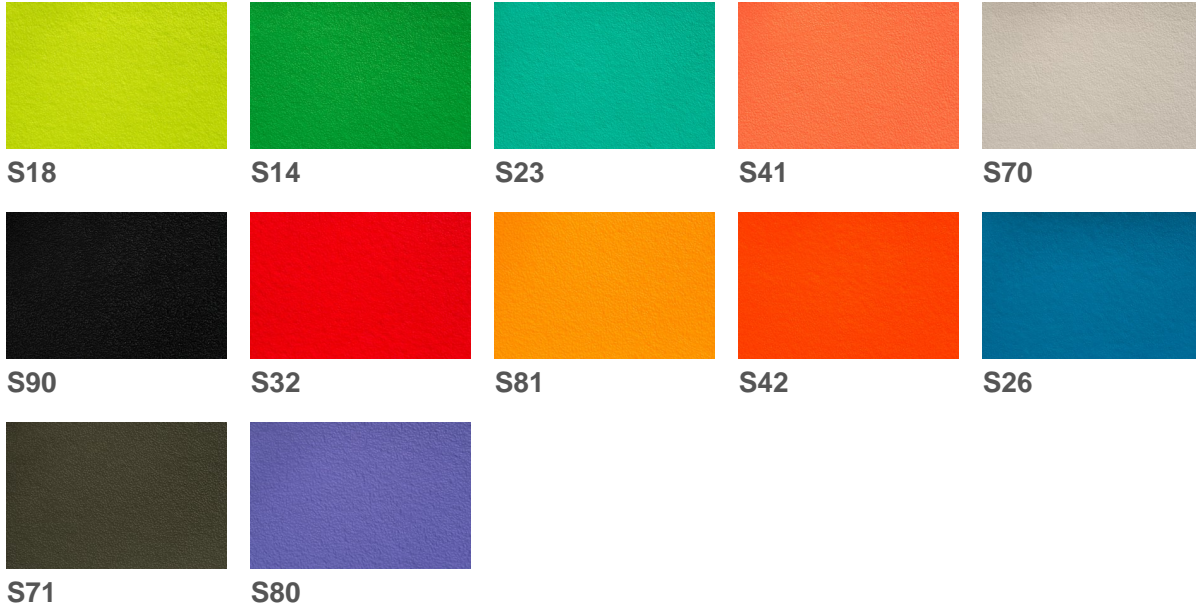

This color range is to be used as a guideline only.

MAINTENANCE AND INSTALLATION

This product can be installed loose-laid without adhesive onto the concrete subfloor, thanks to the stabilizing underlayment which is lightly textured with small embossed nodes.

The product must be stored and installed in appropriate conditions, including suitable protected premises at guaranteed minimum and maximum temperatures and humidity, as fully described in MONDO's *Storage and Installation Instructions*. The product must be used and maintained following the premises described in MONDO's *Use and Maintenance Instructions*.

DIMENSIONS

Thickness	Length	Width	Weight
7 mm	20 m	195 cm	4,25 kg/m ²

For additional product information, please refer to the Technical Data Sheet.