


SUPER X PERFORMANCE™

MORE THAN 30 YEARS ON TOP THE WINNER'S PODIUM.

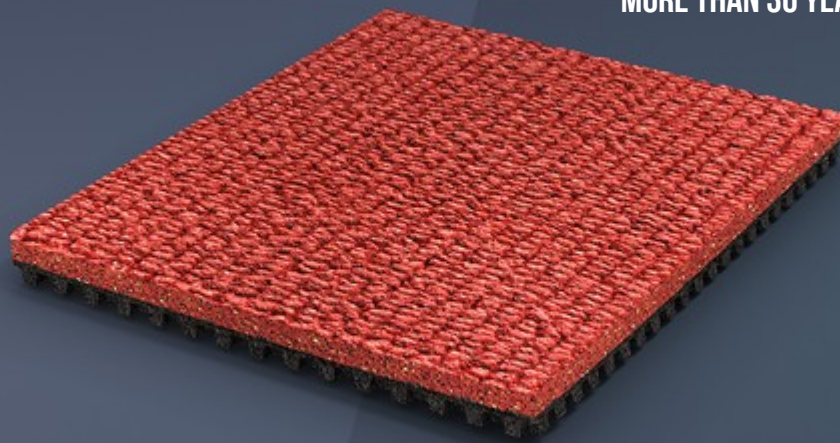

WHEN IT COMES TO PREFABRICATED RUBBER TRACKS, SUPER X PERFORMANCE™ HAS A LONG LIST OF WINS.

EXEMPT DE MICROPLASTIQUES

Surface exempte de revêtements suprafaciaux et de granules de microplastique partiellement encapsulés.



MULTICOUCHES DOUBLE DUROMETRE CO-VULCANISEES

Le produit est composé par deux couches différentes de caoutchouc solide, unies par le processus de vulcanisation. Le résultat final est un matériau continu, sans jonctions.



TECHNOLOGIE A CELLULES D'AIR

Couche inférieure avec construction géométrique à alvéoles remplies d'air, pour garantir l'absorption de la force d'impact, le stockage de l'énergie et la réponse cinétique immédiate.



SUPER X PERFORMANCE™

As the world's first prefabricated vulcanized rubber track, it is unrivaled.

The result of over 30 years of experience, the surface guarantees optimal athletic performance, combining comfort, safety and durability, for both school and recreational use.

TWO LAYERS COMBINE FOR ONE-OF-A-KIND PERFORMANCE

During a controlled production process, Sportflex Super X™'s two layers are vulcanized together to create a uniform, continuous, joint-free product with truly unique characteristics. Unlike other systems produced, this process creates a molecular bond that prevents the layers separating.

PERFORMANCE, COMFORT AND SAFETY: A WINNING COMBINATION.

The top rubber layer guarantees elasticity and resistance to spikes, while its anti-reflective embossing provides grip, traction and good drainage. The bottom layer has a geometric structure of four-sided air cells that are deformable in two dimensions to provide shock absorption and energy return. This special structure is laid out in the running direction to provide a differentiated biomechanical response according to the pressure produced by the athlete.

RESPECT THE ENVIRONMENT

Per MONDO's quest for environmental sustainability, Sportflex Super X™ is made using up to 37% of recycled post-consumer and post-industrial materials and up to 6% rapidly renewable materials. In its indoor version, Sportflex Super X™ is certified GREENGUARD and GREENGUARD Gold, due to low emissions of VOCs (volatile organic compounds).

6 MM

ÉPAISSEUR	POIDS	LONGUEUR DE ROULEAU	LARGEUR DE ROULEAU
6 mm	2.25 lbs/pi² (11.0 kg/m²)	19' 8" to 65' 7" (6m to 20m)	4' 0" to 6' 0" (1.22 to 1.83 m)

GAMME DE COULEURS




P10 (GR.3)



P14 (GR.3)



P85 (GR.2)




P18 (GR.2)




P31 (GR.2)




P06 (GR.2)



P58 (GR.1)




P30 (GR.1)




P123 (GR.4)




P124 (GR.4)




P105 (GR.1)



P125 (GR.4)



P122 (GR.1)



P121 (GR.4)



P115 (GR.3)

8 MM

ÉPAISSEUR	POIDS	LONGUEUR DE ROULEAU	LARGEUR DE ROULEAU
8 mm	1.43 lbs/pi ² (7.0 kg/m ²)	19' 8" to 65' 7" (6m to 18m)	4' 0" to 6' 0" (1.22 to 1.83m)

GAMME DE COULEURS



P10 (GR.3)



P14 (GR.3)



P85 (GR.2)




P18 (GR.2)




P31 (GR.2)




P06 (GR.2)



P58 (GR.1)




P30 (GR.1)




P123 (GR.4)




P124 (GR.4)




P105 (GR.1)



P125 (GR.4)



P122 (GR.1)



P121 (GR.4)



P115 (GR.3)

10 MM

ÉPAISSEUR	POIDS	LONGUEUR DE ROULEAU	LARGEUR DE ROULEAU
10 mm	1.74 lbs/pi ² (8.5 kg/m ²)	19' 8" to 55' 9" (6m to 17m)	3' 0" to 5' 7" (0.92 to 1.70 m)

GAMME DE COULEURS



P10 (GR.3)



P14 (GR.3)



P85 (GR.2)



P18 (GR.2)




P31 (GR.2)




P06 (GR.2)



P58 (GR.1)




P30 (GR.1)



P123 (GR.4)



P124 (GR.4)




P105 (GR.1)



P125 (GR.4)



P122 (GR.1)



P121 (GR.4)



P115 (GR.3)

12 MM

ÉPAISSEUR	POIDS	LONGUEUR DE ROULEAU	LARGEUR DE ROULEAU
12 mm	1.94 lbs/pi² (9.5 kg/m²)	19' 8" to 52' 5" (6m to 16 m)	3' 0" to 5' 7" (0.92 to 1.70 m)

GAMME DE COULEURS



P10 (GR.3)



P14 (GR.3)



P85 (GR.2)



P18 (GR.2)




P31 (GR.2)




P06 (GR.2)



P58 (GR.1)




P30 (GR.1)



P123 (GR.4)



P124 (GR.4)




P105 (GR.1)



P125 (GR.4)



P122 (GR.1)



P121 (GR.4)



P115 (GR.3)

13,5 MM

ÉPAISSEUR	POIDS	LONGUEUR DE ROULEAU	LARGEUR DE ROULEAU
13,5 mm	2.25 lbs/pi² (11.0 kg/m²)	19' 8" to 52' 5" (6m to 16 m)	3' 0" to 5' 7" (0.92 to 1.70 m)

GAMME DE COULEURS



P10 (GR.3)



P14 (GR.3)



P85 (GR.2)



P18 (GR.2)




P31 (GR.2)




P06 (GR.2)



P58 (GR.1)




P30 (GR.1)



P123 (GR.4)



P124 (GR.4)




P105 (GR.1)



P125 (GR.4)



P122 (GR.1)



P121 (GR.4)



P115 (GR.3)

CERTIFICATIONS

Sportflex Super X 13.5mm IAAF Product Certificate