


SUPER X PERFORMANCE™

MORE THAN 30 YEARS ON TOP THE WINNER'S PODIUM.

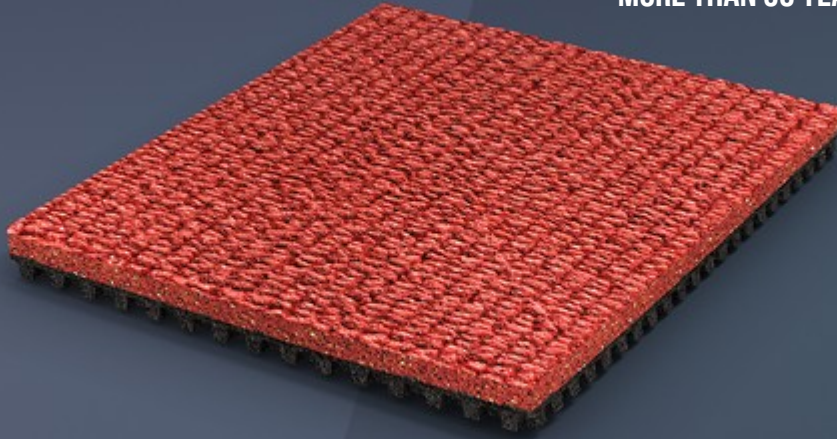

WHEN IT COMES TO PREFABRICATED RUBBER TRACKS, SUPER X PERFORMANCE™ HAS A LONG LIST OF WINS.

LIBRE DE MICROPLÁSTICOS

Superficie libre de gránulos de microplástico parcialmente incrustados.



UNIÓN DE LAS CAPAS MEDIANTE VULCANIZACIÓN

El producto se compone de dos capas diferentes de caucho macizo unidas entre sí mediante un proceso de vulcanización. El resultado final es un material homogéneo y sin uniones.



LA TECNOLOGÍA DE LAS CELDAS DE AIRE

Capa inferior diseñada geométricamente con alveolos llenos de aire para garantizar la absorción de impactos, el almacenamiento de energía y una respuesta motriz inmediata.



SUPER X PERFORMANCE™

As the world's first prefabricated vulcanized rubber track, it is unrivaled.

The result of over 30 years of experience, the surface guarantees optimal athletic performance, combining comfort, safety and durability, for both school and recreational use.

TWO LAYERS COMBINE FOR ONE-OF-A-KIND PERFORMANCE

During a controlled production process, Sportflex Super X™'s two layers are vulcanized together to create a uniform, continuous, joint-free product with truly unique characteristics. Unlike other systems produced, this process creates a molecular bond that prevents the layers separating.

PERFORMANCE, COMFORT AND SAFETY: A WINNING COMBINATION.

The top rubber layer guarantees elasticity and resistance to spikes, while its anti-reflective embossing provides grip, traction and good drainage. The bottom layer has a geometric structure of four-sided air cells that are deformable in two dimensions to provide shock absorption and energy return. This special structure is laid out in the running direction to provide a differentiated biomechanical response according to the pressure produced by the athlete.

RESPECT THE ENVIRONMENT

Per MONDO's quest for environmental sustainability, Sportflex Super X™ is made using up to 37% of recycled post-consumer and post-industrial materials and up to 6% rapidly renewable materials. In its indoor version, Sportflex Super X™ is certified GREENGUARD and GREENGUARD Gold, due to low emissions of VOCs (volatile organic compounds).

6 MM

ESPESOR	PESO	LONGITUD DEL ROLLO	ANCHO DEL ROLLO
6 mm	2.25 lbs/sq.ft. (11.0 kg/m ²)	19' 8" to 65' 7" (6m to 20m)	4' 0" to 6' 0" (1.22 to 1.83 m)

GAMA DE COLORES



P10 (GR.3)



P14 (GR.3)



P85 (GR.2)




P18 (GR.2)




P31 (GR.2)




P06 (GR.2)



P58 (GR.1)




P30 (GR.1)




P123 (GR.4)




P124 (GR.4)




P105 (GR.1)



P125 (GR.4)



P122 (GR.1)



P121 (GR.4)



P115 (GR.3)

8 MM

ESPESOR PESO

LONGITUD DEL ROLLO

ANCHO DEL ROLLO

8 mm 1.43 lbs/sq.ft. (7.0 kg/m²) 19' 8" to 65' 7" (15m (Min. 6m, Max. 18 m)) 4' 0" to 6' 0" (1.22 to 1.83m)

GAMA DE COLORES



P10 (GR.3)



P14 (GR.3)



P85 (GR.2)




P18 (GR.2)




P31 (GR.2)




P06 (GR.2)



P58 (GR.1)




P30 (GR.1)




P123 (GR.4)




P124 (GR.4)




P105 (GR.1)



P125 (GR.4)



P122 (GR.1)



P121 (GR.4)



P115 (GR.3)

10 MM

ESPESOR PESO

10 mm 1.74 lbs/sq.ft. (8.5 kg/m²)

LONGITUD DEL ROLLO

19' 8" to 55' 9" (6m to 17m)

ANCHO DEL ROLLO

3' 0" to 5' 7" (0.92 to 1.70 m)

GAMA DE COLORES



P10 (GR.3)



P14 (GR.3)



P85 (GR.2)




P18 (GR.2)




P31 (GR.2)




P06 (GR.2)



P58 (GR.1)




P30 (GR.1)




P123 (GR.4)




P124 (GR.4)




P105 (GR.1)



P125 (GR.4)



P122 (GR.1)



P121 (GR.4)



P115 (GR.3)

12 MM

ESPESOR PESO

12 mm 1.94 lbs/sq.ft. (9.5 kg/m²)

LONGITUD DEL ROLLO

19' 8" to 52' 5" (6m to 16 m)

ANCHO DEL ROLLO

3' 0" to 5' 7" (0.92 to 1.70 m)

GAMA DE COLORES



P10 (GR.3)



P14 (GR.3)



P85 (GR.2)




P18 (GR.2)




P31 (GR.2)




P06 (GR.2)



P58 (GR.1)




P30 (GR.1)




P123 (GR.4)




P124 (GR.4)




P105 (GR.1)



P125 (GR.4)



P122 (GR.1)



P121 (GR.4)



P115 (GR.3)

13.5 MM

ESPESOR PESO

13,5 mm 2.25 lbs/sq.ft. (11.7 kg/m²)

LONGITUD DEL ROLLO

19' 8" to 52' 5" (6m to 16 m)

ANCHO DEL ROLLO

3' 0" to 5' 7" (0.92 to 1.70 m)

GAMA DE COLORES



P10 (GR.3)



P14 (GR.3)



P85 (GR.2)




P18 (GR.2)




P31 (GR.2)




P06 (GR.2)



P58 (GR.1)




P30 (GR.1)




P123 (GR.4)




P124 (GR.4)




P105 (GR.1)



P125 (GR.4)



P122 (GR.1)



P121 (GR.4)



P115 (GR.3)

CERTIFICADOS

Sportflex Super X 13.5mm IAAF Product Certificate