


# SPORTFLEX SUPER X 720™ K39

MAXIMUM COMFORT AND OPTIMAL PERFORMANCE.



**SPORTFLEX SUPER X 720™ K39 IS THE IDEAL ATHLETIC TRACK SURFACE FOR FACILITIES DEDICATED TO BOTH COMPETITION AND TRAINING BECAUSE IT GUARANTEES ATHLETES THE PERFECT COMBINATION OF SHOCK ABSORPTION, VERTICAL DEFORMATION AND ENERGY RETURN.**

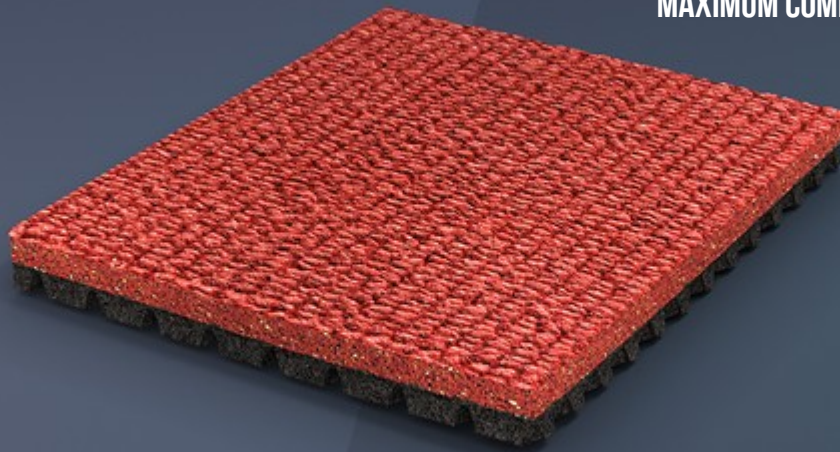

#### **EMBOSSSED SOLID-RUBBER TOP LAYER**

Vulcanized rubber surface layer with raised embossing for optimal elasticity and grip, and efficient drainage.




#### **CO-VULCANIZED MULTI-LAYER DUAL DUROMETER**

Our sport surfaces are made from two layers of solid rubber vulcanized together to form a continuous, seamless surface.



#### **AIR-CELL TECHNOLOGY**

Air-filled chambers on the bottom layer compress, then expand, acting like bowstrings and projecting athletes up and forward.



#### **ELONGATED HONEYCOMB BACKING**

Hexagonal air-filled chambers surrounded by ribs that deform in three dimensions on the track underlayment minimize the time the athlete is in contact with the flooring, maximize energy return, and optimize the floor's reaction time.



## **SPORTFLEX SUPER X 720™ K39**

The vulcanized, prefabricated structure of Sportflex Super X 720™ K39 ensures uniform dynamic response across the entire track, providing optimal control over stride length. It's the perfect solution for areas of facilities dedicated to conventional training and competition because it guarantees a shock absorption coefficient of 39% and meets World Athletics performance criteria.

Sportflex Super X 720™ K39 has a uniform thickness of 13.5 mm and is compatible with shoes with spikes up to 12 mm (6 mm and 9 mm compression spikes recommended).

### **A WINNING TRADITION.**

Pairing Mondotrack™'s bottom layer and the traditional Sportflex Super X™ top layer, Sportflex Super X 720™ is the perfect combination of comfort and performance.

The rubber-based top layer is characterized by the traditional Sportflex Super X™ pattern, guaranteeing unrivaled elasticity and great spike resistance. This texture, which has been imitated but never duplicated, ensures excellent grip and traction, and efficient water runoff in the rain.

### **A TOP-NOTCH LOWER LAYER.**

The Super X 720™'s backing features the same geometrical elongated honeycomb construction as Mondotrack WS™.

The hexagonal air cells deform in three dimensions and guarantee the ideal combination of shock absorption and energy storage and return, enhancing the surface's reaction times and reducing athletes' fatigue and risk injury.

### **RESPECT FOR PERFORMANCE AND THE ENVIRONMENT**

Sportflex Super X 720™ is one example of MONDO's commitment to environmental sustainability: Made in MONDO's Gallo d'Alba factory, which is powered by a photovoltaic system, it includes up to 38% contaminant-free, recycled post-consumer and post-industrial material, and 10% rapidly renewable materials. Sportflex Super X 720™ has GREENGUARD and GREENGUARD Gold certification, due to its minimal volatile organic compound (VOC) emissions and the absence of amines and isocyanates.

## DIMENSIONS

### THICKNESS WEIGHT

13,5 mm 2.45 lbs/sq.ft. (12.0 kg/m<sup>2</sup>)

### ROLL LENGTH

49'2" (Min. 19'8"- Max. 52'9') (min 10 m / max 15 m 3'-5'7" (0.92 to 1.70 m )

### ROLL WIDTH

## I / VERSION

### THICKNESS WEIGHT

13,5 mm 12.0 kg/m<sup>2</sup>


### ROLL LENGTH

min 10 m / max 15

### ROLL WIDTH

122-160

## COLOR RANGE



P10 (GR.3)



P14 (GR.3)



P85 (GR.2)



P18 (GR.2)




P31 (GR.2)




P06 (GR.2)



P58 (GR.1)




P30 (GR.1)




P123 (GR.4)



P124 (GR.4)




P105 (GR.1)



P125 (GR.4)



P122 (GR.1)



P121 (GR.4)



P115 (GR.3)

## CERTIFICATIONS

WA (IAAF) Product certificate Sportflex Super x 720 K39 13, 5 mm

Super X 720 Greenguard Certification

Super X 720 Greenguard Gold Certification

Super X 720 I Greenguard Certification

Super X 720 I Greenguard Gold Certification