


ADVANCE VULCANIZED

TOUGH MEETS COMFORT



ADVANCE VULCANIZED IS A MULTI-LAYERED FLOORING MADE OF VULCANIZED RUBBER. ITS THREE LAYERS HAVE VARYING DEGREES OF HARDNESS, AND THE COMBINATION MAKES IT HANDS DOWN THE MOST DURABLE MULTIPURPOSE FLOORING AROUND.

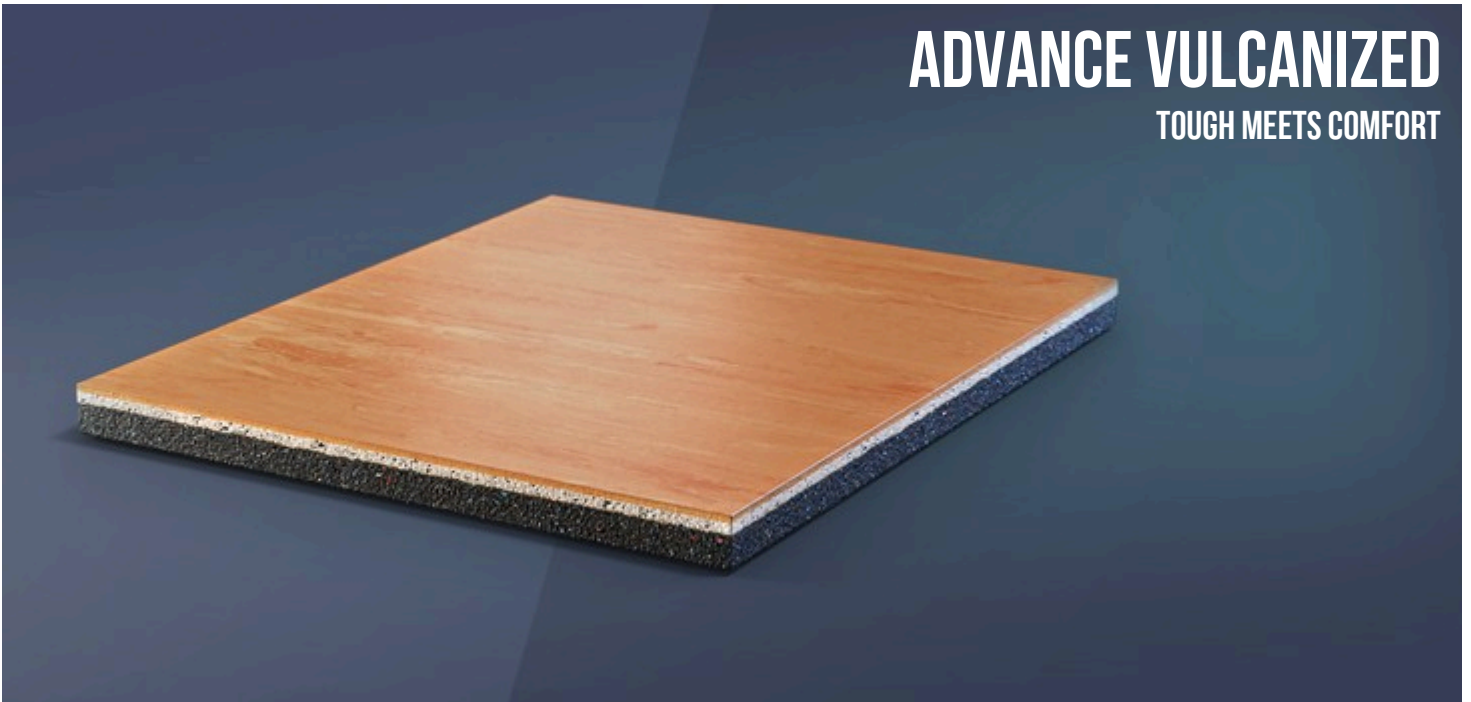

MULTICOUCHES DOUBLE DUROMETRE CO-VULCANISE

Le produit est composé par deux couches différentes de caoutchouc solide, unies par le processus de vulcanisation. Le résultat final est un matériau continu, sans jonctions.



TECHNOLOGIE A CELLULE D'AIR

Couche inférieure avec construction géométrique à alvéoles remplies d'air, pour garantir l'absorption de la force d'impact, le stockage de l'énergie et la réponse cinétique immédiate.



COUCHE SUPERFICIELLE EN CAOUTCHOUC SOLIDE LISSE

Surface en caoutchouc vulcanisé à finition lisse, pour installations d'intérieur, qui assure naturellement l'adhérence superficielle sans nécessité de gaufrages supplémentaires.



ADVANCE VULCANIZED

In basketball, support starts under the feet: the right energy return, stability and grip provide the perfect base for top athletic performance. Advance Vulcanized combines three layers to meet all play needs, from practices to championship finals.

Speed, agility and explosive leaping. Volleyball requires a high-end surface capable of supporting high-performance play. That's Advance Vulcanized.

BETTER GRIP MEANS BETTER PERFORMANCE

The performance layer is made of solid rubber that requires no finishes or surface coatings. It is designed to exceed the toughest friction coefficient standards for high-level play and superior biomechanical performance.

LESS IMPACT, MORE COMFORT

The underlayer's deformable geometric structure increases the flooring elasticity. This results in optimized foot support, exceptional shock absorption and maximized energy return for superior comfort while playing.

MAXIMUM SUPPORT FOR HEAVY LOADS

The load disbursement layer enables Advance Vulcanized to withstand heavy loads, such as sports equipment, bleachers, benches and tables.

INFORMATION DES DIMENSIONS

ÉPAISSEUR


8 mm

10 mm

GAMME DE COULEURS



L35




L14



L25



L41



L40



L54



L70



L73



L86



L08



L06



L62



L92