

## MONDO PORTABLE BLEACHER



### DESCRIPTION

MONDO portable standard bleachers are compatible with both indoor and outdoor conditions. They are manufactured in a three-row structure with wheels at the back, and a capacity of 12 spectators (four spectators in each row, considering a 0,5 m space for each one).

The bleacher structure is made of several metal parts built in steel squared profile. Once all assembled with screws, the complete structure has the necessary stiffness to withstand spectator load.

The steel used is of S235JR quality. When the complete steel structure has been welded, it is submitted to a zinc treatment (hot-dip galvanizing process) that completely coats it. The zinc coat keeps the structure completely protected against humidity and outdoor conditions.

By pulling the structure up from the front part, the whole bleacher module can stand on wheels. When completely vertical, the bleacher can be moved and stored in a different location. To return it to use position it should be operated the other way back: swing the bleacher module toward the front until it can rest on the support feet, Once completely horizontal.

All screws are also submitted to a zinc treatment of 6.8 quality minimum.

There are black plastic pieces located at the end of each steel pipe, to prevent dirt or water accumulation inside.

The platforms used as corridors are made of aluminum with anti-slip surface and are supported by the steel structure.



Rear view



Vertical portable position  
(supported on the rear wheels)




The seating area can be manufactured in two options:

- Seat bench in white phenolic plywood board (High Pressure Laminated, HPL), screwed onto the tubular underneath steel structure. White colour is used to prevent discoloration due to UV radiation. The material is waterproof, suitable for outdoor use.




- MONDOSEAT 2 injected in polypropylene screwed onto a flat metal sheet, also suitable for outdoor use.

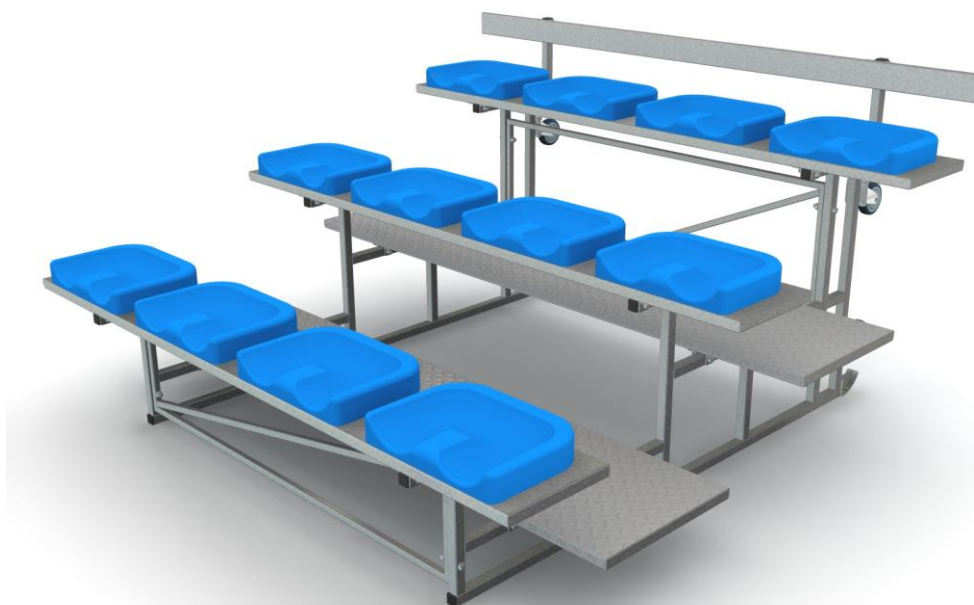


In both designs the bleachers include a rear bar on the highest row, very useful when they are not placed against a wall.

## GENERAL DIMENSIONS


Standard length of 2 metres is the same for both designs (phenolic bench or Mondoseat 2)

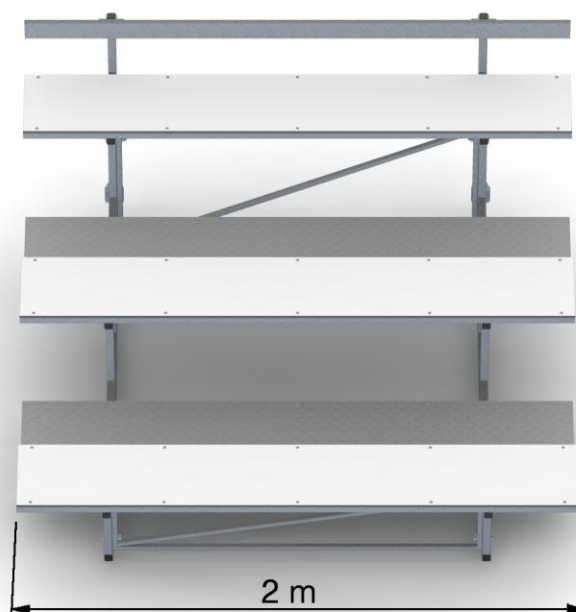


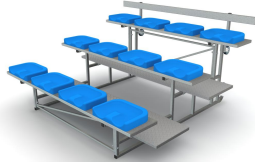
Cross section dimensions for phenolic bench option (Ref.- GT34262)

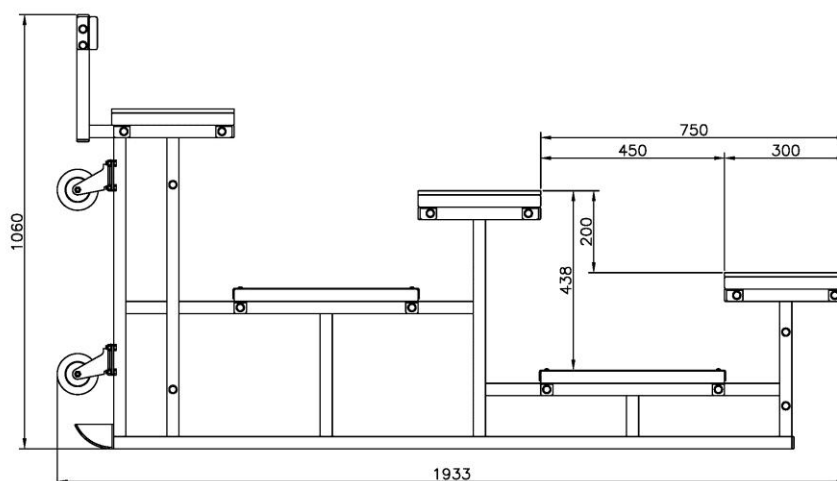

Cross section dimensions for Mondoseat 2 option (Ref.- GT34022)

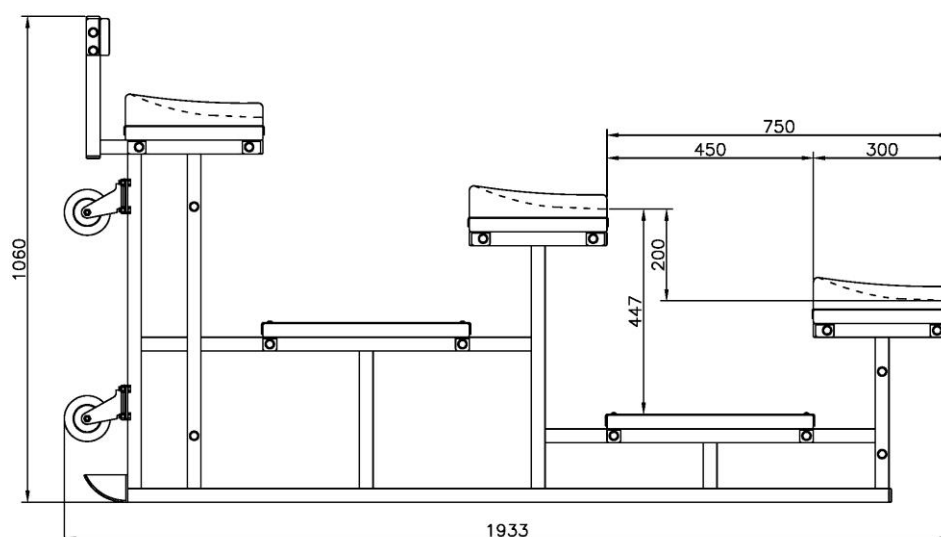

## REFERENCES SUMMARY

Reference	Product description	Picture
GT34262	Unit of portable bleacher in standard dimensions with phenolic white board bench	
GT34022	Unit of portable bleacher in standard dimensions with MONDOSEAT 2 (seat colour depending on existing stock)	

## APPLICATION AND USE

This product has been considered as a bench for 12 spectators. It can be used for both indoor or outdoor conditions as it is hot-dip galvanized. In both cases it has to be located over a flat and resistant surface. It is not allowed to use it for other different reasons, otherwise it would be consider as a wrong use of the equipment.

By pulling the structure up from the front part, the whole bleacher module can stand on wheels. When completely vertical, the bleacher can be moved and stored in a different location. To return it to use position it should be operated the other way back: swing the bleacher module toward the front until it can rest on the support feet, Once completely horizontal.

MONDO advise to change into portable position by raising the front part of the bleacher and being controlled by one or two two persons before it stands vertically onto the rear wheels. Same for the opposite operation.

## SHIPPING INFORMATION

### GT34262

One bulk packed placed on a pallet and wrapped.  
Bulk dimensions: 1.100 x 2.100 mm x 600 mm  
Weight: 130kgs + pallet weight

### GT34022

Three bulks:

One bulk packed placed on a pallet and wrapped.  
Bulk dimensions: 1.100 x 2.100 mm x 600 mm  
Weight: 130kgs + pallet weight

Two bulks including the seats (two cardboard boxes).  
Bulk dimension: 415 x 300 x 575 mm (each cardboard box).  
Weight: 7 kgs (each cardboard box).

Information valid per one unit. For more than one unit supplied, please request confirmation (it can be optimized).

## GUARANTEE

Mondo provides a guarantee of 2 years on the supplied product in accordance with Mondo standard text.